



NRL/MR/5621--99-8364

Dark HORSE 2 Quick-Look Report: Real-time Detection of Military Ground Targets Using an Infrared Hyperspectral Imaging Sensor

CHRISTOPHER M. STELLMAN
FRANK BUCHOLTZ
JOSEPH V. MICHALOWICZ

*Advanced Concepts Branch
Optical Sciences Division*

April 15, 1999

Approved for public release; distribution is unlimited.

1 19990413 054

| | | | | |
|--|--|---|--|---|
| REPORT DOCUMENTATION PAGE | | | Form Approved OMB No. 0704-0188 | |
| Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503. | | | | |
| 1. AGENCY USE ONLY (Leave Blank) | | 2. REPORT DATE April 15, 1999 | | 3. REPORT TYPE AND DATES COVERED Memorandum report |
| 4. TITLE AND SUBTITLE Dark HORSE 2 Quick-Look Report: Real-time Detection of Military Ground Targets Using an Infrared Hyperspectral Imaging Sensor | | | 5. FUNDING NUMBERS | |
| 6. AUTHOR(S) Christopher M. Stellman, Frank Bucholtz, and Joseph V. Michalowicz | | | | |
| 7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Research Laboratory Washington, DC 20375-5320 | | | 8. PERFORMING ORGANIZATION REPORT NUMBER NRL/MR/5621--99-8364 | |
| 9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Office of Naval Research 800 North Quincy Street Arlington, VA 22217-5660 | | | 10. SPONSORING/MONITORING AGENCY REPORT NUMBER | |
| 11. SUPPLEMENTARY NOTES | | | | |
| 12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited. | | | 12b. DISTRIBUTION CODE A | |
| 13. ABSTRACT (Maximum 200 words) Researchers at the Naval Research Laboratory (NRL) have successfully demonstrated autonomous, real time detection of military ground targets using a long-wave infrared hyperspectral imaging sensor. The work was performed under NRL's Dark HORSE effort, the culmination of a four-year Multispectral Overhead IR/EO Surveillance (MOVIES) program to develop real-time hyperspectral detection, cueing, target location, and target designation capabilities. The following provides an overview of Dark HORSE 2 (DH2), the recently completed second phase of the Dark HORSE effort. The DH2 hyperspectral sensor system is described in detail along with a recent field experiment in which it was employed. The system hardware components, software interface and processing methods are described in detail. In closing, a description of the test flight profiles is given and a preliminary analysis of the collected data is presented. | | | | |
| 14. SUBJECT TERMS Hyperspectral Detection Remote Sensing | | | 15. NUMBER OF PAGES 29 | |
| | | | 16. PRICE CODE | |
| 17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED | 18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED | 19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED | 20. LIMITATION OF ABSTRACT UL | |

CONTENTS

| | | |
|----|---|----|
| 1. | EXECUTIVE SUMMARY | 3 |
| 2. | INTRODUCTION | 3 |
| 3. | DATA COLLECTION INSTRUMENT (Dark HORSE 2) | 4 |
| 4. | FIELD DATA | 12 |
| 5. | RESULTS AND DISCUSSION | 14 |
| 6. | SUMMARY | 20 |
| 7. | ACKNOWLEDGEMENTS | 20 |
| 8. | REFERENCES | 20 |
| 9. | APPENDIX | 22 |

DARK HORSE 2 - REAL-TIME DETECTION OF MILITARY GROUND TARGETS USING AN INFRARED HYPERSPECTRAL IMAGING SENSOR

1. EXECUTIVE SUMMARY

The Dark HORSE 2 program has realized the following accomplishments:

- Successfully integrated real-time processor with SEBASS LWIR system.
- Demonstrated real-time airborne LWIR detection of targets with good ROC performance using two simultaneous anomaly detection algorithms (s-RX and LBG).
- Fully corrected, calibrated LWIR data cubes obtained in real-time.
- Obtained high-quality data sets (LW&MW) for use in development of tactically-robust algorithms.

2. INTRODUCTION

The need for strategic military surveillance of critical ground targets has been well recognized in the military community. Multispectral and hyperspectral sensors offer the possibility of exploiting the spectral differences between targets of interest and local backgrounds as a detection discriminant. In addition, rapid developments in computing power and anomaly detection algorithms have led to the possibility of real-time target identification and location. These developments combined with the results of NRL's four-year Multispectral Overhead IR/EO Surveillance (MOVIES) program [1] have led to Project Dark HORSE, a four-year four-phase follow on program to develop real-time hyperspectral detection, cueing and target location capabilities. In the first phase of this program, Dark HORSE 1, it was demonstrated that a visible hyperspectral sensor could be used for the autonomous, real-time detection of airborne and military ground targets [2-4]. In the recently completed second phase of the program, Dark HORSE 2, it has been demonstrated that a long-wave infrared hyperspectral sensor can be used in the same manner, with the advantages of improved detection performance and day/night flying capabilities.

The following provides an overview of the Dark HORSE 2 (DH2) long-wave infrared (LWIR) hyperspectral sensor system and the recent field experiment in which it was employed. The system hardware components, software interface and processing methods are described in detail. A description of the test flight profiles is given and a preliminary analysis of the collected data is presented.

3. DATA COLLECTION INSTRUMENT (Dark HORSE 2)

The complete DH2 system is composed of three components, a mid wave infrared (MWIR) and long wave infrared (LWIR) hyperspectral sensor, a sensor controller and a real-time processor. Respectively, Figure 1, Figure 2 and Figure 3 show the sensor, the controller, and the real-time processor installed aboard a Twin Otter aircraft (Figure 4), the airborne platform used for this field test. The hyperspectral sensor and sensor controller, SEBASS (Spatially Enhanced Broad-band Array Spectrograph System), were provided by the Aerospace Corporation, Los Angeles, CA. The Space Computer Corporation, Santa Monica, CA and the Naval Research Laboratory, Washington, DC, jointly developed the real-time processing system.

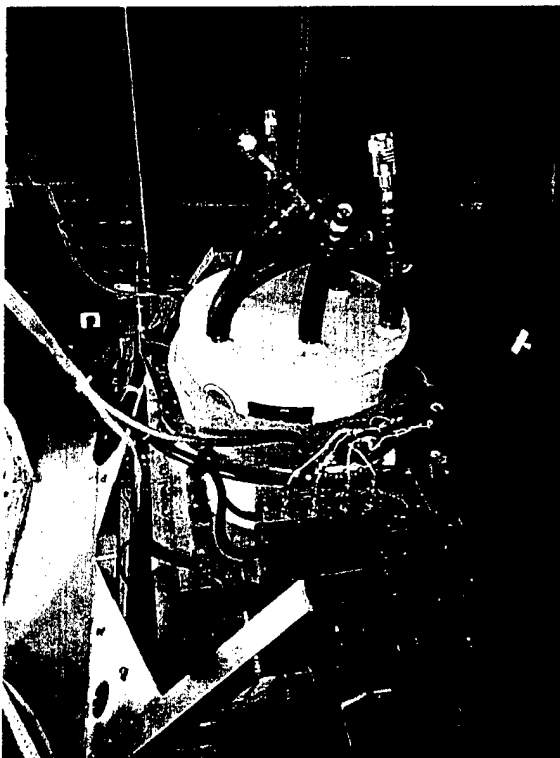


Figure 1: Dark HORSE 2 Sensor (SEBASS).



Figure 2: Dark HORSE 2 System Controller.

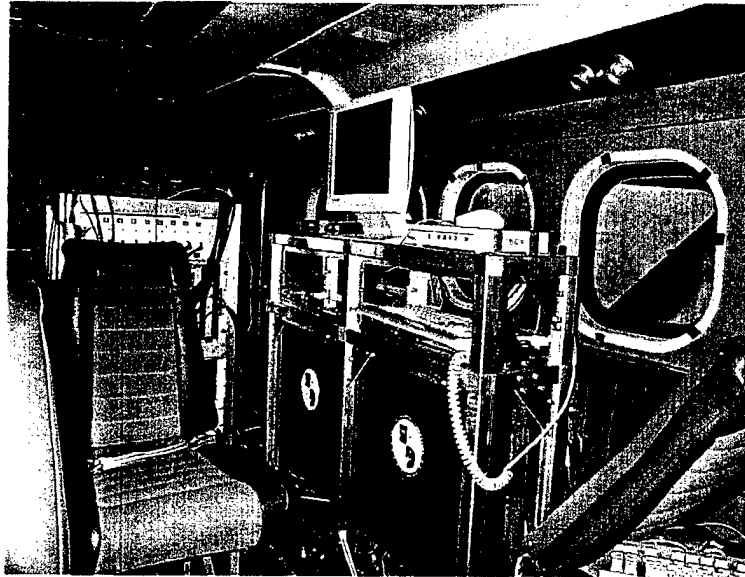


Figure 3: Dark HORSE 2 Real-Time Processing System.

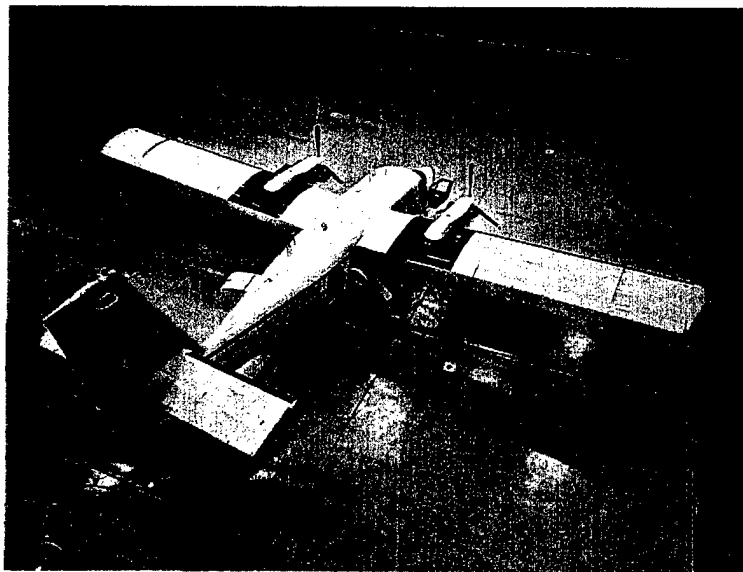


Figure 4: Dark HORSE 2 Airborne Platform – Twin Otter.

The hyperspectral sensor is a dispersive imaging spectrograph operating concurrently in the MWIR and LWIR spectral regions with broad-band spectral coverages of (2.5 - 5.3 μm) and (7.8 - 13.4 μm), respectively. The system is ruggedized for airborne applications and has demonstrated high stability and low noise performance. The sensor operates in a pushbroom mode by forming a dispersed image of the entrance slit onto the two two-dimensional arrays. The two focal plane arrays, one for the MWIR and one for the LWIR, are each 128 x 128 pixels x 14 bits deep. For both arrays one dimension gives spectral

information and the other dimension gives spatial information in the cross-track direction cross-track. Scanning the slit across the scene of interest using aircraft motion gives spatial information in the down-track direction and results in a three-dimensional hyperspectral data cube. The sensor operates in a nadir-only mode with an instantaneous field of view per pixel of approximately 1 mrad. Nadir-only viewing is accomplished using a roll stabilization platform. Pitch and yaw stabilization and forward velocity correction are not employed.

Figure 5 shows the optical layout of the spectrograph. Light from the scene of interest is imaged on the spectrograph entrance slit by a three-mirror anastigmatic telescope whose f/ratio is f/7.2. A dichroic beamsplitter that reflects wavelengths shorter than $6.5\ \mu\text{m}$ and transmits longer wavelengths separates light exiting the slit. Use of the dichroic beamsplitter guarantees that both spectrograph channels view the same scene simultaneously. Long wavelength light is dispersed by a spherical-faced prism/conic mirror combination and is imaged onto a focal plane array through a zinc selenide lens. The mid-wave infrared light, which is reflected by the dichroic beamsplitter, is dispersed by a spectrograph that is similar in design to the LWIR channel but uses a lithium fluoride prism. The LWIR and MWIR channels each have a resolution of about $4\ \text{cm}^{-1}$ or $0.050\ \mu\text{m}$ per pixel and $0.025\ \mu\text{m}$ per pixel, respectively.

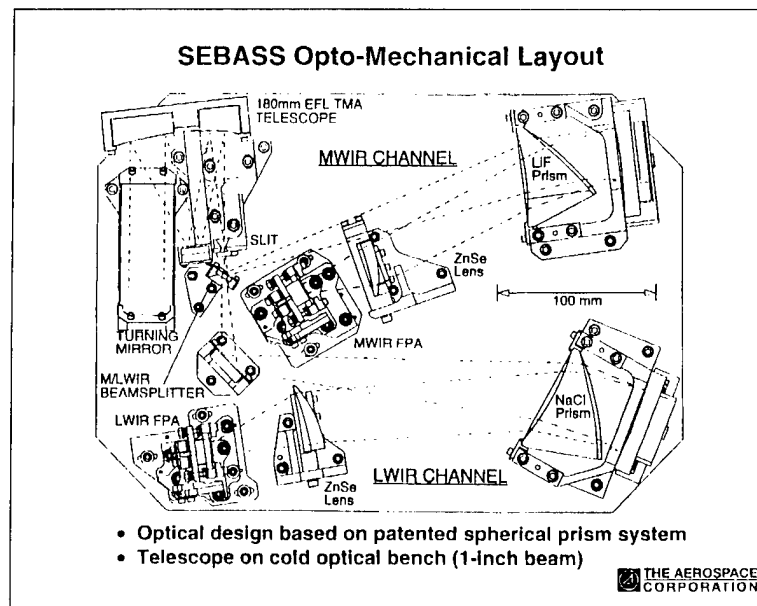


Figure 5: Dark HORSE 2 (SEBASS Sensor) Opto-Mechanical Layout.

The sensor is controlled by a Sun Sparc-20 computer using a data handling system built around a VME bus system. The user interface provides a method of entering required input parameters such as archival file names and camera frame rates and provides a means of starting and stopping data collections.

The controller is also responsible for all data handling. Figure 6 is a schematic of the sensor controller's data handling system. All of the clock signals that control the operation of the focal plane multiplexers and the timing signals for the analog-to-digital converters are generated by a programmable microsequencer whose timing control can be adjusted in 67 nanosecond increments. Each array has four independent channels that read the signals from four consecutive pixels along the spectral axis per clock cycle. The four analog signals from the arrays are amplified and converted to digital data by high-speed 14-bit analog-to-digital converters. The digital data are passed directly to a special-purpose "co-adder" board that computes the difference between the signal and reset values and co-adds data from successive frames. Although the system is capable of taking data without differencing, it typically operates in a mode where the signal is computed as the difference between the voltage at the end of integration and the voltage when the multiplexer is reset. This approach reduces common-mode noise at the cost of a small increase in random noise since two noisy voltage readings are differenced. Differencing also avoids problems with dc drifts in the preamplifiers that can introduce systematic errors in the measured signal.

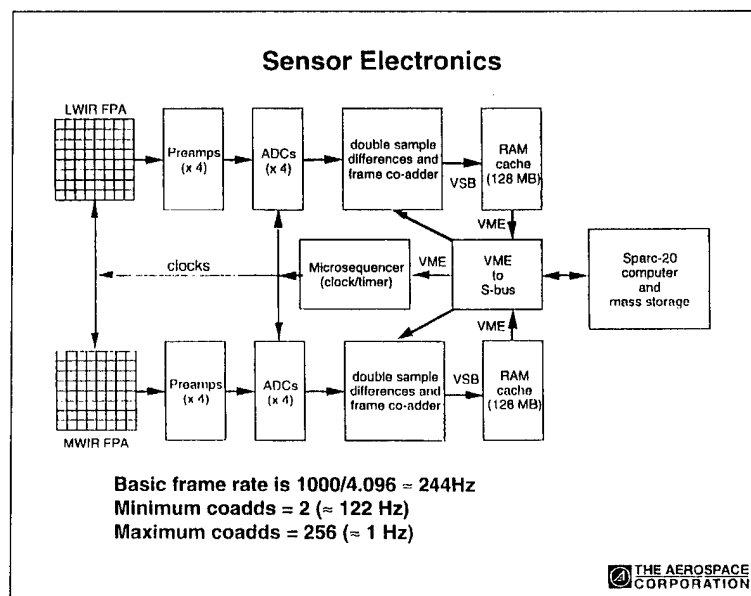


Figure 6: *Dark HORSE 2 (SEBASS Sensor) Schematic Diagram of the Data Handling System.*

Each frame of data can be digitally co-added to the sum of a selectable number of previous frames using a 24-bit adder. This feature allows frame data to be stored at a slower rate than the focal plane frame rate. At the read rate of four pixels per clock cycle and a cycle interval of 1 μsec , the entire array is read in 4096 μsecs , which is approximately a rate of 244 frames per second. At a lower frame rate the multiplexer summing capacitor would become saturated before the end of the integration time. The co-adder effectively

allows the infrared signal to be integrated off the multiplexer without loss of signal; it also allows the output frame rate to match the rate at which the image moves across the ground. For example, the Twin Otter aircraft used for this experiment had a typical ground speed of 120 knots or about 62 meters per second. Thus, to achieve one sample in a ground distance of 1 meter, four successive data frames were added together to give an effective output data rate of 61 frames per second. During a collection data from the co-adder is sent to a cache RAM that has a 384 Mbyte (6134 frame) capacity. At the end of each data collection, data from the cache RAM is transmitted via a VME bus to the host Sparc-20 computer for storage to disk and tape.

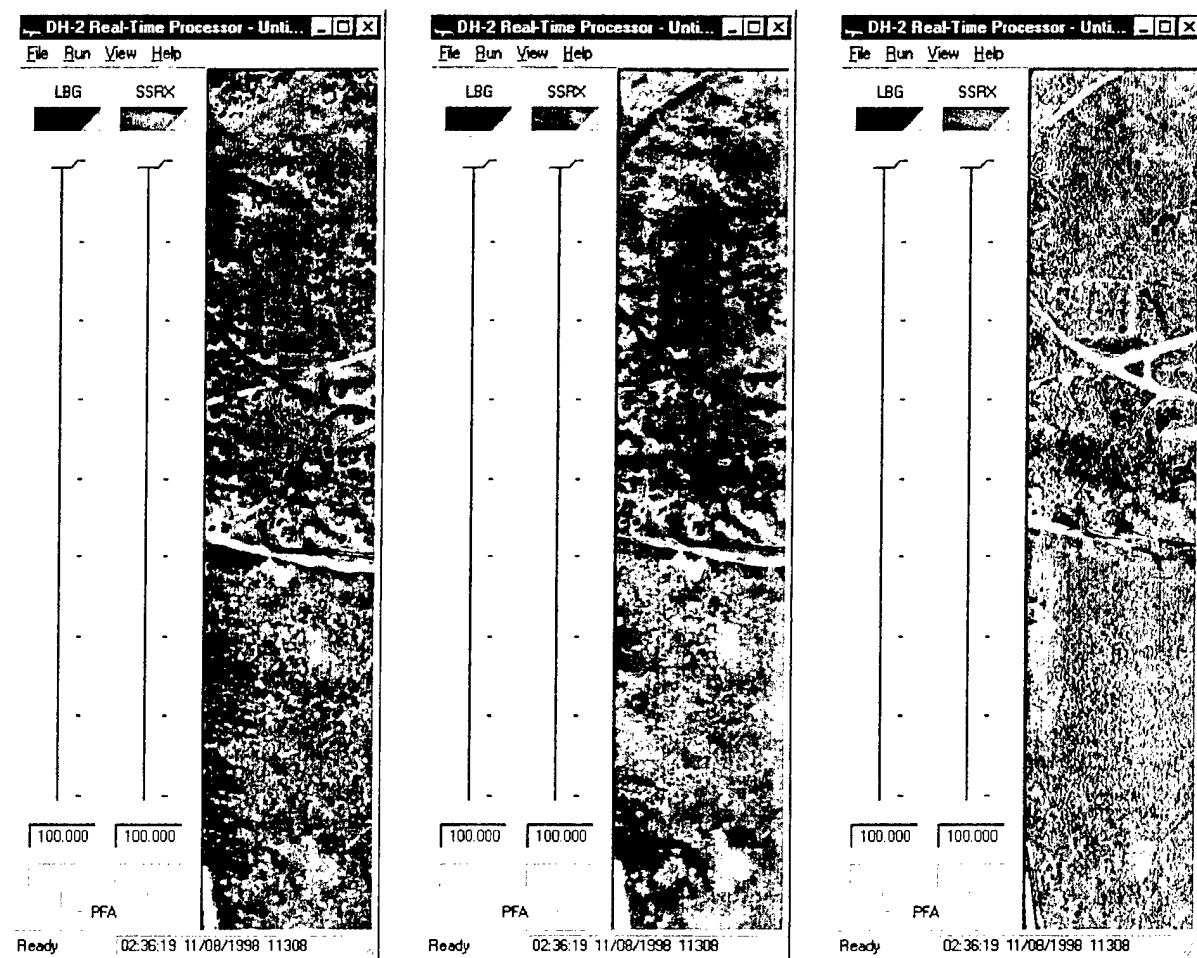


Figure 7: Available Dark HORSE 2 Waterfall Displays.

Broadband (left), 3-Color Spectral Composite (middle) and 3-Band Principal Component Composite (right).

Two anomaly detection algorithms, a subspace RX [3,5,6] and LBG clustering [3,7-9] algorithm, are run in parallel using a real-time data processing system. The real-time processing system consists of two

200 MHz Pentium Processors with DSP subsystems (8 Analog Devices SHARC). The first processor performs flat fielding, bad pixel interpolation, smile correction, spectral binning, radiometric calibration, and archives all raw and calibrated data. The second processor runs the two detection algorithms, generates cue files, outputs waterfall display data, and archives all detector outputs, target cues and user inputs. A custom software application runs under the Microsoft Windows NT operating system and provides the user a means of changing algorithm parameters and thresholds. The software also gives the user data output in the form of a several different real-time waterfall displays, based on a broadband spectral output, a 3-color spectral composite output or a 3-band principal component composite output (Figure 7).

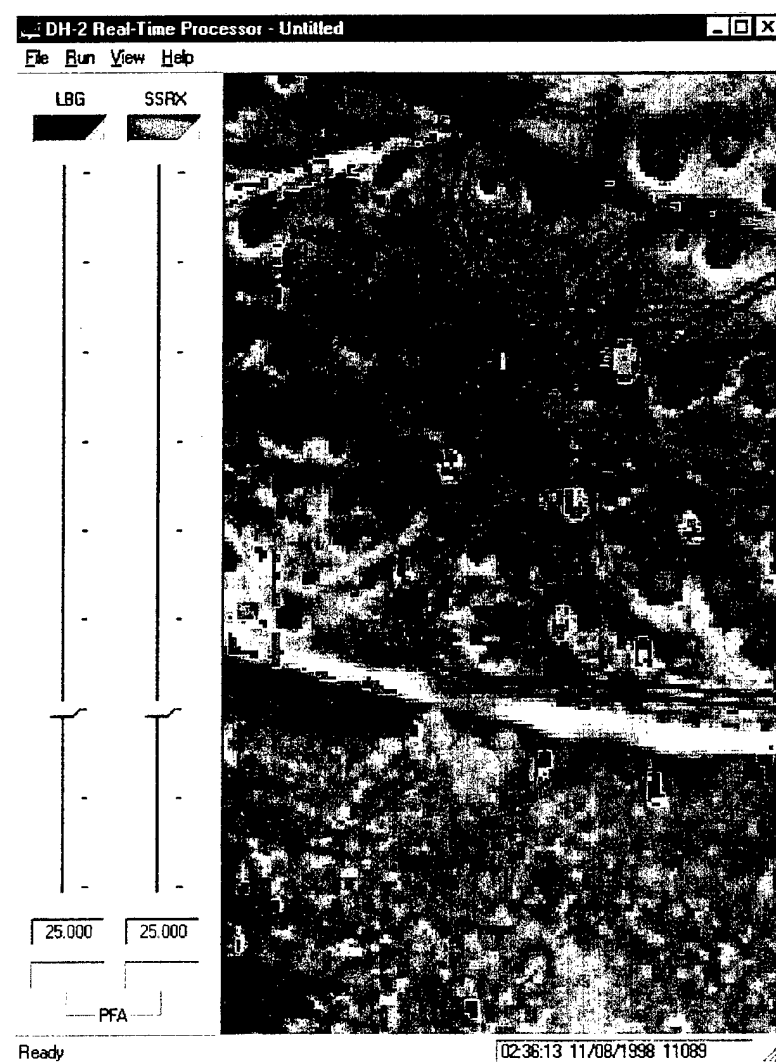


Figure 8: Dark HORSE 2 Waterfall Display Showing Anomalous (Cued) Pixels.
RX detection (red), LBG detection (blue) and coincident detection (green).

During operation, the waterfall display can be overlaid with a map of the anomalous (cued) pixels. Figure 8 shows a portion of a Dark HORSE waterfall display over a region of interest. The display highlights pixels identified as anomalous by RX detection (red), LBG detection (blue) and coincident detection (green). It should be noted that all of the targets of interest used in this field test could be identified with acceptably low false alarm rates using coincident detection. Algorithm performance is discussed below in greater detail.

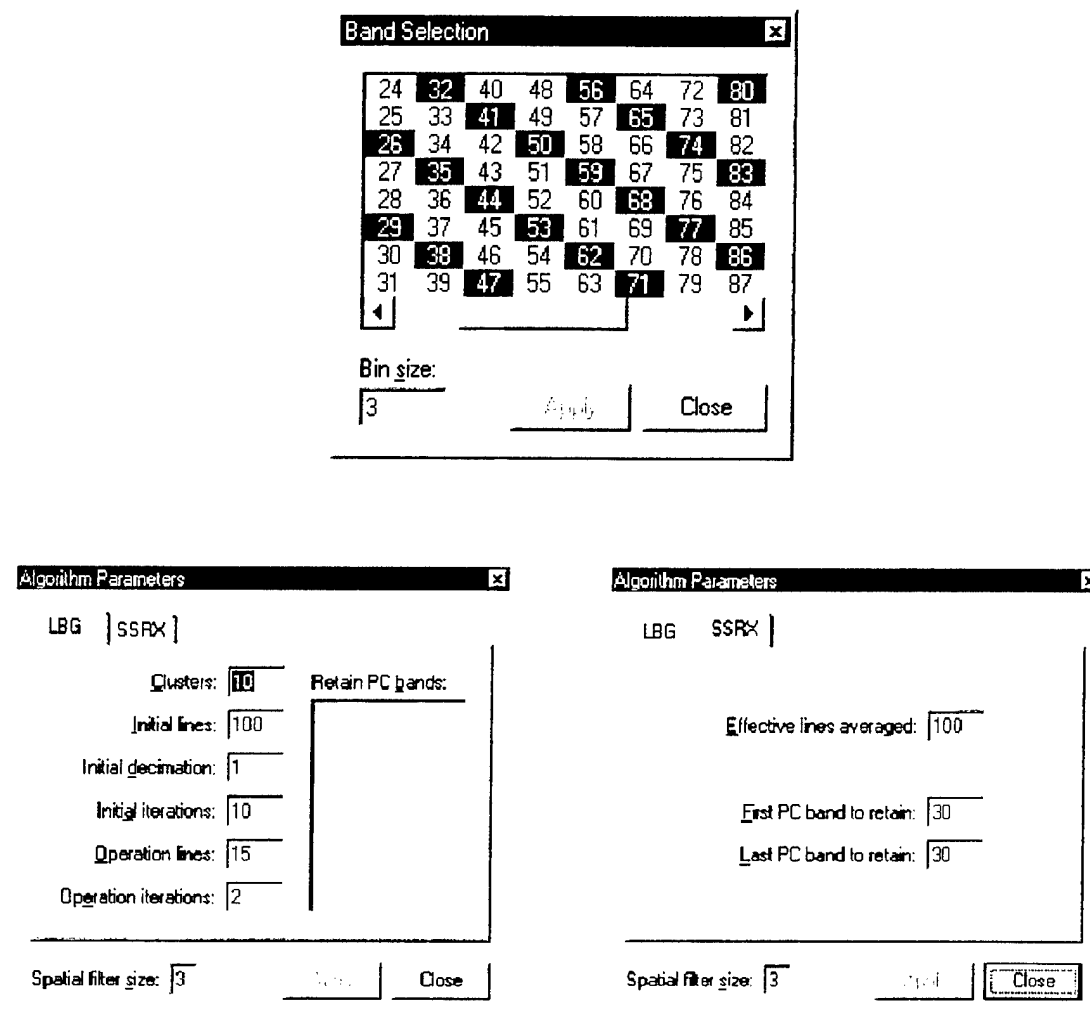


Figure 9: Dark HORSE 2 Real-Time Processing System Parameters Listing User Interfaces

For the subspace RX algorithm the user can define the wavelength bands used for spectral analysis, the number of lines used for recursive filtering, the PC bands used for RX data modeling and size of the employed spatial filter (Figure 9). For the LBG clustering algorithm the user can define the wavelength bands used for spectral analysis, the number of clusters employed, the number of lines used for initialization and decimation, the number of clustering iterations used during initialization and operation, and the size of the employed spatial filter (Figure 9).

The following provides an overview of system specifications for the hyperspectral sensor and controller and real-time processor. Some typical flight parameters are also listed.

| Hyperspectral Sensor and Controller (Developed by Aerospace) | |
|--|---|
| Spectrometer Type | Dispersive Prism |
| MWIR Wavelength Range | 2.5 - 5.3 μm |
| LWIR Wavelength Range | 7.8 - 13.4 μm |
| MWIR CCD Array | 128 x 128 PtSi |
| LWIR CCD Array | 128 x 128 PtSi |
| Frame Rate | 244 Hz with 4 co-adds = 61 Hz |
| Pixel Depth | 14 bit |
| Output Data Size (Raw) | 128 Pixels x 128 Bands x 16 bit Precision |

| Real-Time Processor (Developed by SCC and NRL) | |
|--|--|
| Platform | Pentium Pro, 200 MHz |
| DSP Processor | 8 Analog Devices SHARC |
| Peak Processor Power | > 1 Glop/s |
| Algorithm #1 | Subspace RX with Spatial Filtering |
| Algorithm #2 | LBG Clustering with Spatial Filtering |
| Output Data Size (Calibrated) | 128 Pixels x 30 Bands x 32 bit Precision |

4. FIELD DATA

All field data were collected over the Chicken Little Compound, Eglin Air Force Base, FL during the dates of November 1-10, 1998. An aerial photo of the compound is shown in Figure 10. Outlined on this photo are six of twelve target sites. The target sites (#3, #4, #5, #6, #7, #9) were of interest for this collect due to the military vehicles and/or materials that were present. Vehicles of interest included T-72 tanks, 2S-3 152mm self-propelled howitzers, 2S-1 122mm self-propelled howitzers, ZIL-131 trucks, GAZ-66 trucks, artillery command and reconnaissance vehicles (ACRVs), artillery radars (Big Freds), MAZ-543 P Transporter-Erector-Launchers (TELs), SS-1 Scud B missiles, ZIL-131 support vehicles, BTR-70 APC security vehicles, SA-06 SAM TELs, SA-08 SAM TELs, SA-13 SAM TELs, URAL-4320 reload vehicles, URAL-375 surrogate radar vehicles and ZSU-23-4 quad 23mm self-propelled anti-aircraft gun systems. Materials of interest included various aluminum panels (CARC, black-sprayed and flame-sprayed), aluminized plastic panels, fiber-glass panels, rubber sheets, military canvases and parachutes, Swedish Barracuda camo kits, TRACOR CC&D camo kits, Soviet Woodland camo kits, East German Garnish and Woven camo kit, and a diverse range of soil types and moisture contents, ranging from untrafficable (pond, marsh) to trafficable.

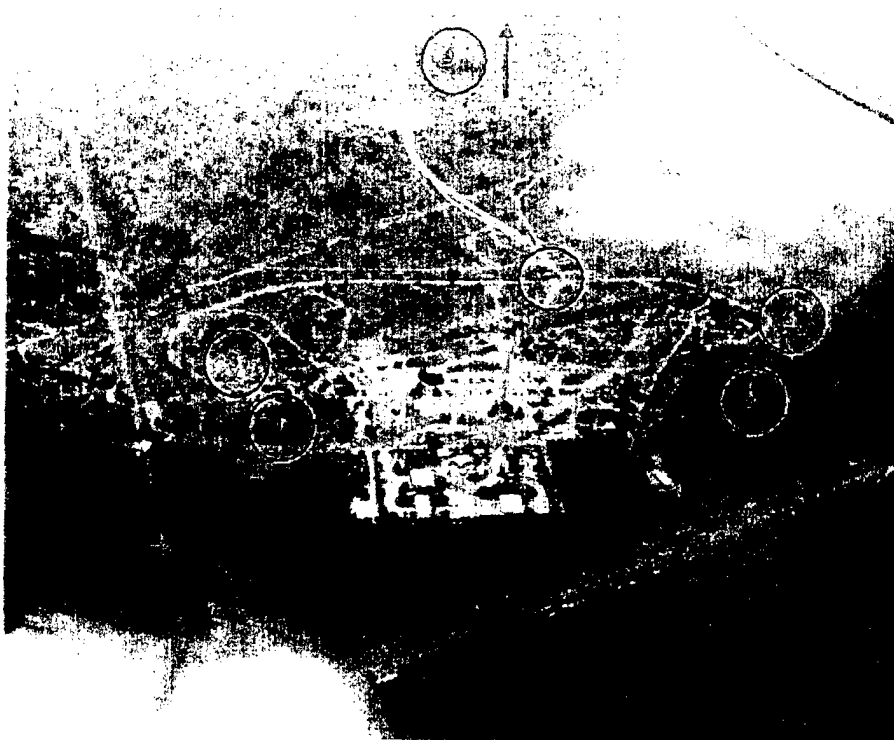


Figure 10: Aerial Photo of the Chicken Little Compound, Eglin Air Force Base, FL.

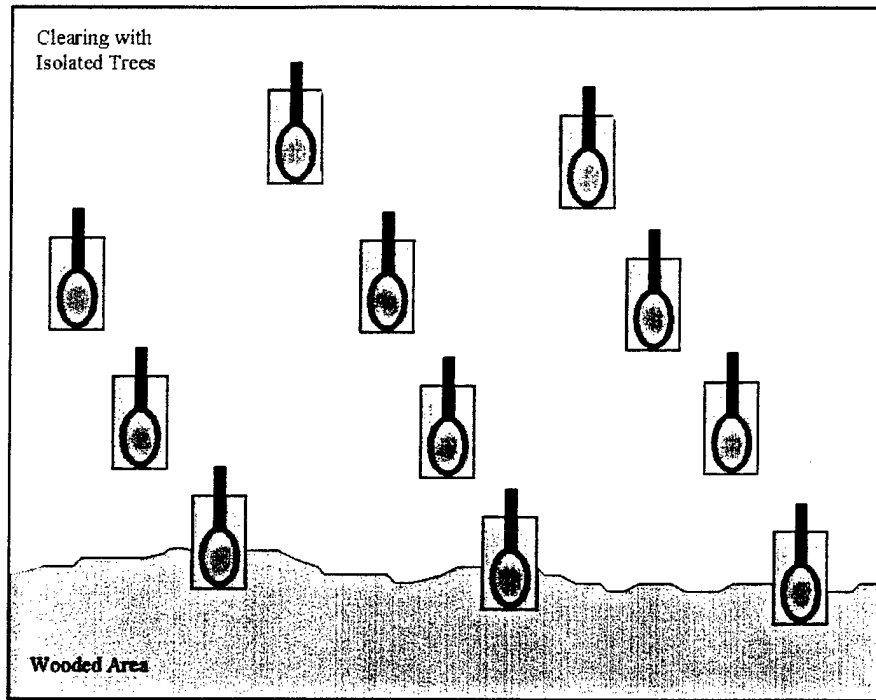


Figure 11: Site 4 Relative Target Locations.

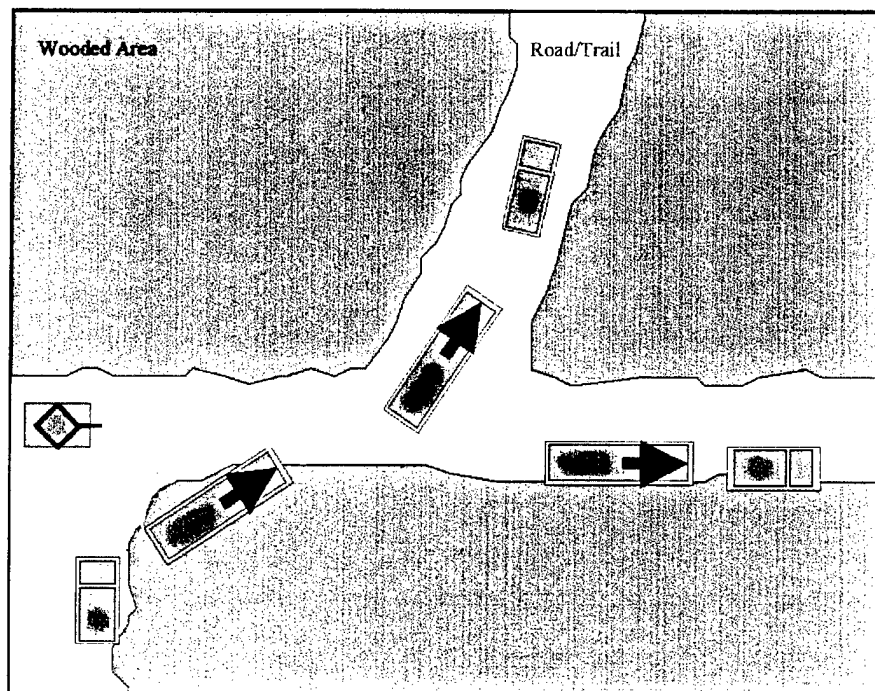


Figure 12: Site 6 Relative Target Locations.

Preliminary analysis of the collected data has been performed on the LWIR data, which is known to be of better quality than the MWIR data. Also, for the purposes of these preliminary studies only data sets pertaining to mission 3 site 4 and mission 3 site 6 have been examined for algorithm performance. These sites have been chosen because the targets are known to be of strong interest to the military community. Furthermore, site 4 has been emphasized because the performance of the currently used RX and LBG algorithms will be compared to future change detection algorithms (that are currently under development). Figure 11 and Figure 12 outline the relative positions of the targets for site 4 and site 6 respectively.

All field data were collected at altitudes between 850 and 870 m and at relative ground speeds between 110 and 120 m/s. For this study the sensor collected data using both the MWIR and LWIR detectors operating at a co-added frame rate of 61 Hz. This resulted in a hyperspectral cross-track ground pixel size of 0.9 m and a down-track ground pixel size of 1.0 m. The number of frames collected for each of the data collects ranged between 500 and 4500 frames and corresponding path lengths of 500 and 4500 meters, respectively. Measurements were collected under varying combinations of cloud cover (clear to cloudy) and light conditions (mid-day to mid-night). In total 83 field data sets were collected and 65 of those data sets have been deemed “good” based on a preliminary quick-look analysis. A detailed listing of the collected data sets with file names and brief annotations is provided in the appendix.

5. RESULTS AND DISCUSSION

Figure 13 and Figure 16 show a series of images used in determining the performance of the RX and LBG algorithms for site 4 and site 6. For both figures the first image (A) is a broadband image of the collected data used for identification of the target region of interest. The second image (B) is a 3-color principal component (PC) image used for making a target truth mask. The truth mask has been overlaid and the targets are highlighted in pink. The third image (C) is the RX detection output using optimized algorithm parameters. The detected pixels are highlighted in red. And finally, the fourth image (D) is the LBG detection output using optimized algorithm parameters with the detected pixels highlighted in blue. It should be noted that the presented images only represent a subset of the collected data sets. The data sets were examined in their entirety when determining algorithm performance.

Respectively, Figure 14 and Figure 15 show the RX and LBG Receiver Operating Characteristic (ROC) curves for site 4. Figure 14 gives an overlay of RX ROC performance using the in-flight algorithm parameters (dashed black line) and using the post-flight optimized algorithm parameters (solid red line). For the in-flight RX analysis the thermal PC (PC1) and the leading five color PCs were projected out. For the post-flight RX analysis the thermal PC and only the first two color PCs were projected out. Figure 15 gives an overlay of LBG ROC performance using in-flight (dashed black line) and post-flight algorithm

parameters (solid blue line). The in-flight LBG analysis employed eight background-dominated color PCs and clustered data into ten classes while the post-flight LBG analysis retained all 29 color PCs and used only three classes. As expected, Figure 14 and Figure 15 show that the algorithms perform better using the optimized post-flight parameters. It is also evident from Figure 14 and Figure 15 that for a 50% Probability Of Detection (P_D) a False Alarm Rate (FAR) on the order of one to ten per square kilometer is achievable.

Figure 16 and Figure 17 show the RX and LBG ROC curves for site 6. Like the previous figures an overlay of RX and LBG ROC performance using in-flight and post-flight optimized algorithm parameters are shown. Some algorithm parameters are different from those used for site 4. For the in-flight RX analysis the thermal PC (PC1) and the leading eleven color PCs were projected out and for the post-flight RX analysis, the thermal PC and the first two color PCs were projected out. The in-flight LBG analysis employed eight background-dominated color PCs and clustered data into ten classes and the post-flight LBG analysis retained all 29 color PCs and used only five classes. Again, as expected, the algorithms perform better using the optimized post-flight parameters. However, at a 50% P_D site 6 gives a somewhat higher FAR (\geq ten per square kilometer) than that achieved for site 4.

It should be noted that for both site 4 and site 6 the RX algorithm performs significantly better than the LBG algorithm. An evaluation of algorithm fusion and its effects on performance is currently under way. Based on the results of Dark HORSE 1 it is expected that some improvement in reducing FAR for a given P_D will be achieved. The evaluations of several other algorithms are also currently under investigation. While a detailed explanation of these algorithms is far beyond the scope of this document a brief list follows. Algorithms employing traditional matched filter methods and matched filter variants, such as interrupted matched filters and subspace interrupted matched filters are being explored. Algorithms based on background modeling are also under development. These include linear mixing model, stochastic mixing model and clustering based methods. In addition to these purely spectral based algorithms there are also ways to exploit other degrees of freedom available in the collected data sets. Chronochrome target detection (change detection) is being examined as a means of identifying targets through exploitation of spectral changes over time. Finally, the use of spatial information is also being pursued. Efforts to use texture models to identify targets and spectral based region growth methods to cluster spatially related pixels are both under way. The fusion of the above detection algorithms is expected to greatly reduce FARs and the results of these studies will be presented in future documents.



Figure 13: Mission 3 Site 4 Detection Results. (A) Broadband Image, (B) Color PC Image with Target Truth Mask, (C) Optimized RX Detection Output and (D) Optimized LBG Detection Output.

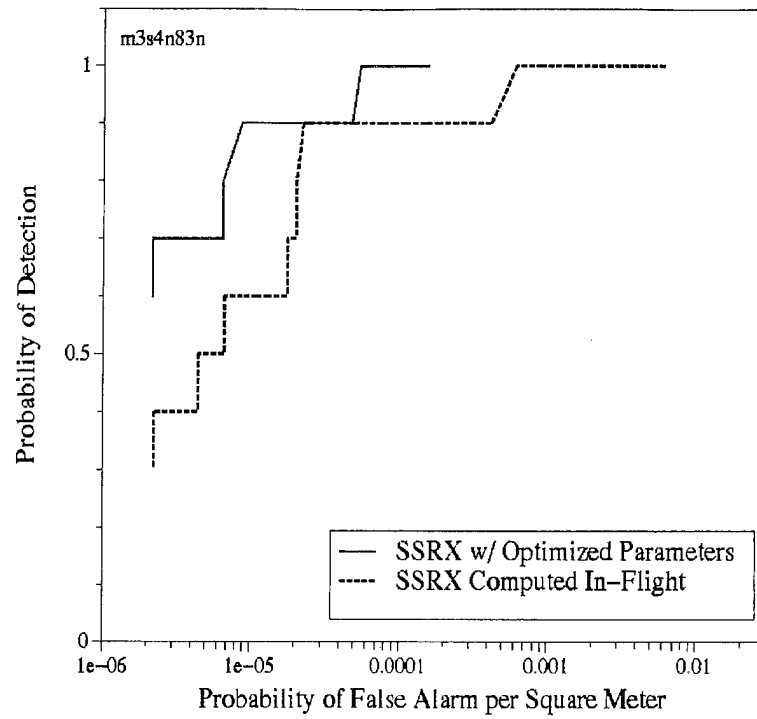


Figure 14: Mission 3 Site 4 RX Detection Results.

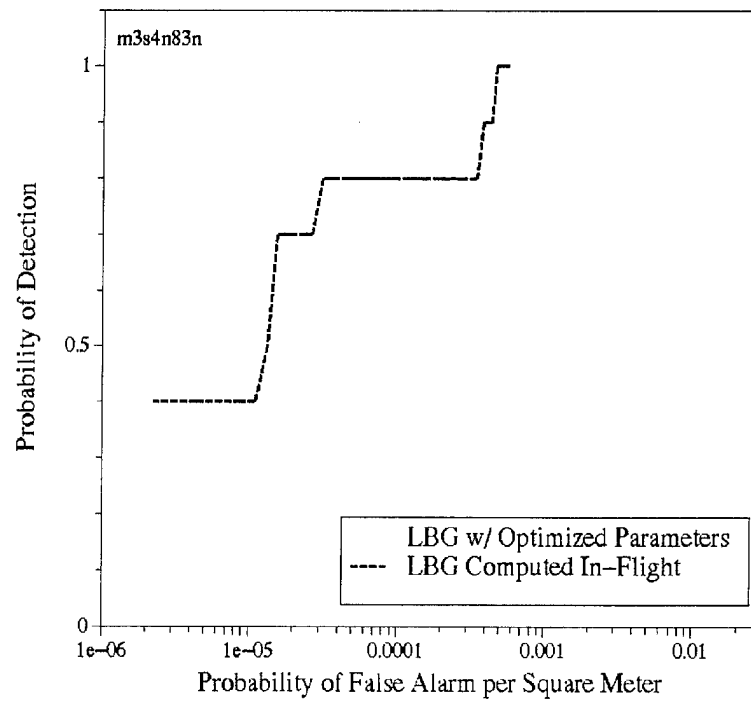


Figure 15: Mission 3 Site 4 LBG Detection Results

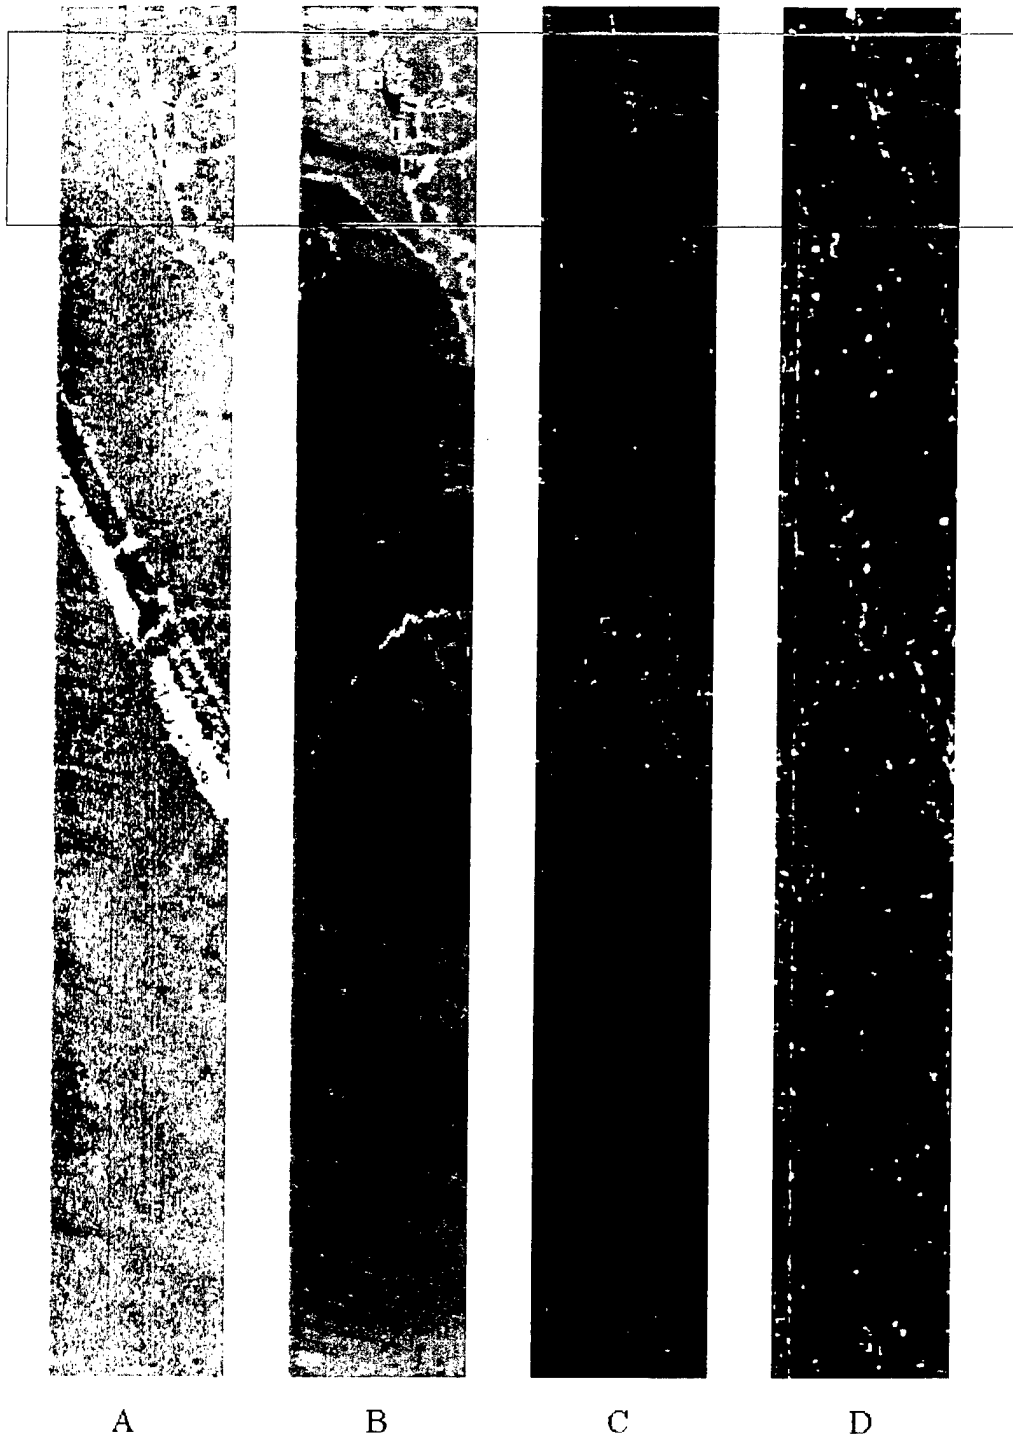


Figure 16: Mission 3 Site 6 Detection Results. (A) Broadband Image, (B) Color PC Image with Target Truth Mask, (C) Optimized RX Detection Output and (D) Optimized LBG Detection Output.

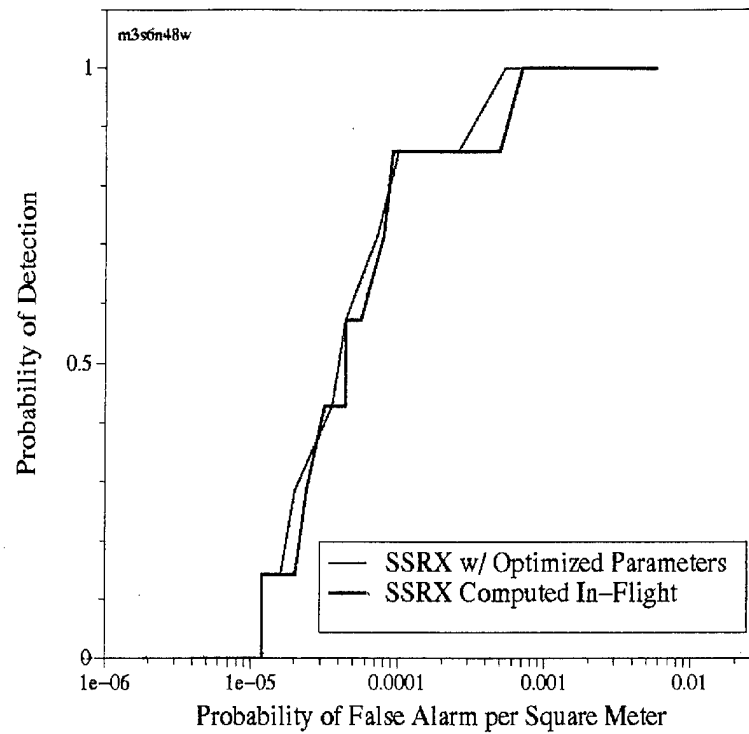


Figure 17: Mission 3 Site 6 RX Detection Results.

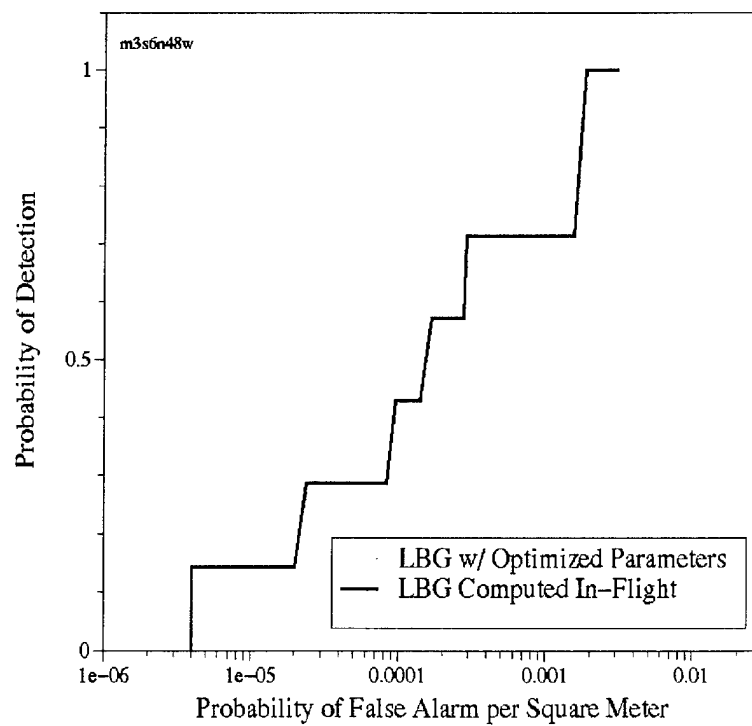


Figure 18: Mission 3 Site 6 LBG Detection Results.

6. SUMMARY

The preceding has provided an overview of the DH2 hyperspectral sensor system and the recent field experiment in which it was employed. Successful integration of the NRL DH2 real-time processor and the SEBASS LWIR sensor has been achieved. Field tests demonstrated real-time airborne LWIR detection of targets with good ROC performance using two simultaneous anomaly detection algorithms (s-RX and LBG). And finally, numerous fully corrected and calibrated LWIR data cubes were obtained in real-time. These high-quality data sets (LW&MW) will be used for future development of other tactically robust algorithms.

7. ACKNOWLEDGEMENTS

The authors would like to thank Alan Stocker, William Schaff, Clark Olifant and Eskander Ensafi of Space Computer Corporation for their contributions to the real-time processor system and for their assistance during the field data collect. A special thanks goes to Alan Stocker for providing some of the preliminary algorithm performance results. The authors would also like to thank John Hackwell, Niel Schulenburg, Brad Johnson, Steve Hansel, Cameron Purcell, Eric Keim, Rich Boucher and Tom Hayhurst for their contributions to the SEBASS sensor system integration and for their support during the field data collect. A special thanks goes to Neil Schulenburg for providing technical information on the SEBASS sensor.

8. REFERENCES

- [1] "Multispectral Field Measurements for the Multispectral Overhead IR/EO Surveillance Program", W. Shaffer, A. Schaum, E. Ashton, M. McHugh and J.V. Michalowicz, NRL Formal Report 5621-96-9831, 13 September 1996.
- [2] "Real-Time Hyperspectral Detection and Cueing", C.M. Stellman, F. Bucholtz, G.G. Hazel, D. Brown, G. Lynn and J.V. Michalowicz, Submitted to Optical Engineering, January 1999.
- [3] "Hyperspectral Reconnaissance Experiment at Visible Wavelengths with Real-Time Detection and Cueing (Dark HORSE 1)", C.M. Stellman, F. Bucholtz, G.G. Hazel and J.V. Michalowicz, Proceedings of the 1998 Meeting of the IRIS Specialty Group on CC&D, In Press, January 1999.

- [4] "Spectral Calibration, Spatial Mapping and Flat Fielding Studies of the Dark HORSE 1 (DH1) March Data Collection", C.M. Stellman, G.G. Hazel, J.M. Schuler, F. Bucholtz and J.V. Michalowicz, NRL Technical Report, NRL/MR/5620--99-8332, January 1999.
- [5] "Adaptive Multiple-Band CFAR Detection of an Optical Pattern with Unknown Spectral Distribution", I.S. Reed and X. Yu, IEEE Transaction on Acoustics, Speech and Signal Processing, Vol. 38, No. 10, October 1990.
- [6] "Comparative Performance Analysis of Adaptive Multispectral Detectors", I.S. Reed, X. Yu and A.D. Stocker, IEEE Transactions Signal Processing, Vol. 41, No. 8, August 1993.
- [7] "An Algorithm for Vector Quantizer Design", Y. Linde, A. Buzo and R. Gray, IEEE Transaction on Communication Theory, Vol. 17, June 1993.
- [8] "Algorithms for the Detection of Sub-Pixel Targets in Multispectral Imagery", E.A. Ashton and A. Schaum, Photogrammetric Engineering and Remote Sensing, Vol. 64, July 1998.
- [9] "Detection of Subpixel Anomalies in Multispectral Infrared Imagery Using an Adaptive Bayesian Classifier", E.A. Ashton, IEEE Transaction on Geoscience and Remote Sensing, Vol. 36, No. 2, March 1998.

Dark HORSE 2 / HYDRA
Flight Log and Quick-Look Summary

9. APPENDIX

1. Summary listing: Best of DH2 / HYDRA

| | |
|----------|---|
| Site 3 | m3s3n69n_19981107_030711[2943] |
| Site 4 | <p>All: targets_19981101_170745/north/pcbands m4s4n143n_19981108_023551 m4s4n60e_19981108_012603</p> <p>Rem: m3s4n83n_19981107_031856 m3s6n48w_19981107_024946 m3s4n27e_19981107_023523</p> |
| Site 5 | <p>m2s5n54n_19981105_132113 / pc bands 5-7 / Good on ENVI. Site 5 = L300!</p> <p>m3s5n55n_19981107_025516 m4s5n108n_19981108_020557</p> |
| Site 6 | <p>m2s6n109n_19981105_140550/pc bands 5 / Site 6 at L1370</p> <p>m2s6n47n_19981105_131532 / Looks good on ENVI. Site 6 = L300</p> <p>m3s6n13w_19981107_013924 m4s6n67w_19981108_013144</p> |
| Site 7 | <p>m3s7n6n_19981107_021802 m4s7n122n_19981108_021753 m2s7n61n_19981105_132641</p> |
| Site 9 | m1s9_19981104_090429 |
| Site 12 | m2s12n68n_19981105_133240 |
| S9 Freon | <p>m4s9n46n_19981108_010710 / (4 lb) / Release at L3389.</p> <p>m4s9n53n_19981108_011835 / (26 lb)</p> |

Note: To transform from ENVI image to north up (for northbound flights):

Step 1: Rotate 90 deg with transpose

Step 2: Rotate 180 deg.

2. Summary of Change Detection Experiment

| Mission | Change Detection Configuration |
|-----------|--|
| M5 / Sun | All tanks at s4 |
| M1 / Wed | All tanks at s4 |
| M2 / Thur | Targets P1, P4, & P5 removed. Put in parking lot. |
| M3 / Fri | Targets P1, P4, & P5 still absent |
| M4 / Sat | All tanks at s4. |
| M5 / Mon | All tanks at s4. |
| M6 / Tue | Targets P1, P4, & P5 removed. Two placed on showline (s2). One used to generate smoke. Cancelled due to weather. |

Dark HORSE 2 / HYDRA
Flight Log and Quick-Look Summary

3. Column Heading Nomenclature:

| Name | Meaning |
|---------------|--|
| "Mission 3" | Mission 3 as defined by HYDRA Data Collection Plan |
| Session | Aerospace/SEBASS terminology for a collection of shots, equal to the Zulu time at the start of a data collection. There may be more than one session per flight. |
| File | File name as generated automatically |
| Site | Target site for a particular run |
| Shot | SEBASS shot number as tabulated on SEBASS Flight Log |
| SOG Gnd Speed | Speed Over Ground (meters/sec) |
| COG Direction | Course Over Ground (true heading (GPS)) |
| Altitude | Column header for altitude (meters) |
| Comments | Comments for given run(shot) Black = comments from SEBASS flight log & Esky notes Red = comments generated by viewing file on realtime processor Blue = comments generated by viewing xv file using ENVI. |

4. Filename Nomenclature

| | |
|--------------------------|-------------------------------|
| m2s6n47n_19981105_131532 | Mission 2 |
| m2s6n47n_19981105_131532 | Site 6 |
| m2s6n47n_19981105_131532 | Shot number 47 |
| m2s6n47n_19981105_131532 | north-bound |
| m2s6n47n_19981105_131532 | Year |
| m2s6n47n_19981105_131532 | Date (Zulu) |
| m2s6n47n_19981105_131532 | Time (Zulu) at start of data* |

Example: "m2s6n47n_19981105_131532"

Note: *Local time(EgIn AFB, FL) = GMT - 6hrs

Dark HORSE 2 / HYDRA
Flight Log and Quick-Look Summary

| Mission S Sunday 1 Nov 98 / ~1530-1715 | | | | | | | | | | |
|---|------|------|---------------------|------------|--------|--|-----|-------|-------|---------|
| All tanks s4 | | | | | | | | | | |
| File | Site | Shot | SOG Gnd Speed | COG Dir | Alt(m) | Comments | Pix | Lines | Bands | Type |
| target_19981101_170545 | 4 | na | na | na | na | | 128 | | 30 | 1024 FP |
| targets_19981101_170745 | 4 | na | na | na | na | Great pass over site 4. Site 3 not yet up. | 128 | 1837 | 30 | 1024 FP |

| Mission I Wednesday 4 Nov 98 / 0830-1030 | | | | | | | | | | |
|---|------|------|---------------------|------------|--------|--|-----|-------|-------|---------|
| All tanks site 4 | | | | | | | | | | |
| File (PST-1hr) | Site | Shot | SOG Gnd Speed | COG Dir | Alt(m) | Comments | Pix | Lines | Bands | Type |
| mls4_19981104_074730 | x 4 | na | na | na | na | Eske original Missed to west. Part of site 3. | 128 | 303 | 30 | 1024 FP |
| mls4_19981104_075226 | x 4 | 6 | 124 | 129 | 862 | missed | 128 | 478 | 30 | 1024 FP |
| mls4_19981104_075334 | 4 | 13 | 131 | 176 | 867 | Got all of S3 also Missed slightly to west. Got some site 4 | 128 | 284 | 30 | 1024 FP |
| mls6_19981104_080026 | 6 | 20 | 108 | 84 | 864 | Think got all | 128 | | 30 | 1024 FP |
| mls5_19981104_080830 | x 5 | 27 | 127 | 179 | 856 | Not sure got targ. May have done wrong. | 128 | | 30 | 1024 FP |
| mls7_19981104_081515 | 7 | 34 | 121 | 177 | 859 | got it | 128 | | 30 | 1024 FP |
| mls3_19981104_082120 | 3 | 41 | 117 | 180 | 853 | got it. also site4! | 128 | | 30 | 1024 FP |
| mls4_19981104_082719 | 4 | 48 | 108 | 94 | 837 | got it Good RT results. | 128 | 416 | 30 | 1024 FP |
| mls6_19981104_083423 | 6 | 55 | 111 | 81 | 869 | good one? | 128 | | 30 | 1024 FP |
| mls5_19981104_084220 | 5 | 62 | 125 | 88 | 854 | | 128 | 505 | 30 | 1024 FP |
| mls5_19981104_084717 | 5 | 69 | 125 | 183 | 850 | got it. Some bad data. Pilot radio interference? | 128 | 511 | 30 | 1024 FP |
| mls7_19981104_085352 | 7 | 76 | 116 | 178 | 871 | got most except targs to left | 128 | | 30 | 1024 FP |
| mls7_19981104_085853 | 7 | 83 | 121 | 174 | 846 | got it | 128 | | 30 | 1024 FP |
| mls9_19981104_090429 | 9 | 90 | 106 | 357 | 856 | got it | 128 | | 30 | 1024 FP |
| ***** | | | | | | | | | | |

Dark HORSE 2 / HYDRA
Flight Log and Quick-Look Summary

| Mission 2 Thursday 5 Nov 98 / 0600-0800 | | | | | | | | | | | |
|---|------|------|---------------------|------------|--------|---|-----|-----------------------|-----------|------|------|
| Clear & cold(40's). Some fog and low clouds over site | | | | | | Tanks removed | | Session 981105_121853 | | | |
| File (Zulu time) | Site | Shot | SOG Gnd Speed | COG Dir | Alt(m) | Comments | Pix | Lines | Band s | Head | Type |
| m2s4n6n_19981105_122859 | x 4 | 6 | 107 | 1.9 | 824 | looks good Way to left(west). Only a few site 4!! All of site 3 | 128 | 1160 | 30 | 1024 | FP |
| aborted | x | 13 | | | | no good / aborted | 128 | | 30 | 1024 | FP |
| m2s4n20n_19981105_124303 | x 4 | 20 | 102 | 3.4 | 818 | looks good Too far left. Lots of site3. Not all of 4 | 128 | 629 | 30 | 1024 | FP |
| m2s6n33w_19981105_130430 | x 6 | 33 | 100 | 284 | 804 | maybe not all targets Probably got all of 6 | 128 | 1993 | 30 | 1024 | FP |
| m2s6n40n_19981105_131105 | x 6 | 40 | 97 | 357 | 808 | probably missed Probably missed | 128 | | 30 | 1024 | FP |
| m2s6n47n_19981105_131532 | 6 | 47 | 110 | 350 | 816 | looks good! Maybe site 5 also. No. Looks good on ENVI. Site 6 = L300 | 128 | 1154 | 30 | 1024 | FP |
| m2s5n54n_19981105_132113 | 5 | 54 | 98 | 345 | 810 | Good on ENVI. Site 5 = L300! pc bands 5-7 | 128 | 1118 | 30 | 1024 | FP |
| m2s7n61n_19981105_132641 | 7 | 61 | 99 | 357 | 846 | looked good Slightly to left(west). Got targets | 128 | | 30 | 1024 | FP |
| m2s12n68n_19981105_133240 | 12 | 68 | 97 | 354 | 842 | hit it. some low clouds site 12 = resolution chart | 128 | 1127 | 30 | 1024 | FP |
| bad cal. no data | x | 75 | 94 | 356 | 843 | site9, also got site 7 in shot | 128 | | 30 | 1024 | FP |
| m2s3n88n_19981105_134739 | 3 | 88 | 107 | 2 | 841 | got it. probably some of site 4 also Off to left(west). Got a tank in trees? | 128 | 2995 | 30 | 1024 | FP |
| m2s4n95n_19981105_135336 | 4 | 95 | 107 | 2.4 | 840 | nailed it plus site 3 OK. And all of site 3-- under clouds | 128 | 4017 | 30 | 1024 | FP |
| m2s6n102n_19981105_140008 | x 6 | 102 | 107 | 357 | 840 | Looked OK. Some of site5? nailed it. also got site 5 | 128 | 970 | 30 | 1024 | FP |
| m2s6n109n_19981105_140550 | 6 | 109 | 107 | 3 | 839 | Some clouds over north portion of site 5 at L1530. Not as good as 1105_132113 for site 5. Site 6 at L1370 | 128 | 2453 | 30 | 1024 | FP |
| m2s7n116n_19981105_141049 | 7 | 116 | 105 | 359 | 840 | got it. lots of clouds before+after targets Got it. | 128 | | 30 | 1024 | FP |
| m2s4n123n_19981105_141623 | x 4 | 123 | 106 | 348 | 839 | got it Too far left. Got some of 4. | 128 | 3281 | 30 | 1024 | FP |
| ***** | | | | | | | | | | | |

Dark HORSE 2 / HYDRA
Flight Log and Quick-Look Summary

| Mission 3 Friday 6 Nov 98 / 1900-2130 | | | | | | | | | | | |
|---|------|------|---------------------|------------|--------|---|-----|-------|-----------|------|------|
| Clear & cold(40's). / after sunset / calm | | | | | | | | | | | |
| Tanks removed | | | | | | Session 981107_011825 | | | | | |
| File (Zulu time) | Site | Shot | SOG Gnd Speed | COG Dir | Alt(m) | Comments | Pix | Lines | Band s | Head | Type |
| m3s4n6n_19981107_013003 | 4 | 6 | 109 | 0.8 | 832 | needed to restart session due to operator error | | | | | |
| m3s6n13w_19981107_013924 | 6 | 13 | 112 | 268 | 836 | Good hit on site 4n. some of site 3. | 128 | | 30 | 1024 | FP |
| m3s5n20n_19981107_014514 | 5 | 20 | 107 | 355 | 827 | Good hit on site 6w. Got north third of site 4. | 128 | 2943 | 30 | 1024 | FP |
| m3s5n27n_19981107_015109 | 5 | 27 | 105 | 2.2 | 864 | Good hit on site 6n. Missed site 5. | 128 | | 30 | 1024 | FP |
| m3s7n34n_19981107_015730 | 7 | 34 | 110 | 357 | 840 | Good hit on site 5n. Some of site 6. | 128 | | 30 | 1024 | FP |
| m3s7n41n_19981107_020231 | x | 41 | 108 | 354 | 861 | Missed to east.?? | 128 | | 30 | 1024 | FP |
| | | | | | | Slightly off to west. | 128 | | 30 | 1024 | FP |
| | | | | | | SPARC froze, had to start new session | x | x | x | x | x |
| Clear & cold(40's). | | | | | | | | | | | |
| Session 981107_020736 | | | | | | | | | | | |
| File (Zulu time) | Site | Shot | SOG Gnd Speed | COG Dir | Alt(m) | Comments | Pix | Lines | Band s | Head | Type |
| m3s7n6n_19981107_021802 | 7 | 6 | 110 | 358 | 859 | Got all of site 7n. | 128 | | 30 | 1024 | FP |
| m3s3n13n_19981107_022434 | 3 | 13 | 108 | 0.0 | 110 | All of site 3n. Slightly off to west. | 128 | 1834 | 30 | 1024 | FP |
| m3s4n20e_19981107_023036 | x | 4 | 20 | 111 | 865 | Missed slightly to south. | 128 | | 30 | 1024 | FP |
| m3s4n27e_19981107_023523 | 4 | 27 | 113 | 93 | 855 | Got all of site 4e. | 128 | | 30 | 1024 | FP |
| m3s4n34n_19981107_024005 | 4 | 34 | 114 | 4 | 846 | Great hit on site 4n. Some of site 3. | 128 | | 30 | 1024 | FP |
| na/bad cal | x | 41 | 119 | 272 | 862 | bad cal | x | x | x | x | x |
| m3s6n48w_19981107_024946 | 6 | 48 | 115 | 268 | 854 | Got all of site 4w & site 6w. | 128 | 3381 | 30 | 1024 | FP |
| m3s5n55n_19981107_025516 | 5 | 55 | 107 | 359 | 873 | Got all of site 5n. Some of site 6. | 128 | | 30 | 1024 | FP |
| m3s9n62n_19981107_030049 | x | 9 | 62 | 107 | 854 | Missed site 9 ???(no lights). Swamp = bright? | 128 | | 30 | 1024 | FP |
| m3s3n69n_19981107_030711 | 3 | 69 | 116 | 3.0 | 875 | Got all of site 3n. Some of s4. | 128 | 2647 | 30 | 1024 | FP |
| m3s4n76n_19981107_031337 | x | 4 | 76 | 113 | 865 | Slightly to east on site 4. | 128 | | 30 | 1024 | FP |
| m3s4n83n_19981107_031856 | 4 | 83 | 111 | 357 | 844 | Perfect hit on site 4n. All of site 3 also. | 128 | | 30 | 1024 | FP |

Dark HORSE 2 / HYDRA
Flight Log and Quick-Look Summary

Mission 4
Saturday 7 Nov 98 / 1800-2030

| Clear / 20 kt winds at altitude / all after sunset | | | | All tanks at s4. | | | | Session 981108_001044 | | | |
|--|------|------|---------------------|------------------|--------|--|-----|-----------------------|-------|------|------|
| File (Zulu time) | Site | Shot | SOG Gnd Speed | COG Dir | Alt(m) | Comments | Pix | Lines | Bands | Head | Type |
| m4s9n25n_19981108_003956 | x 9 | 25 | 110 | 356 | 870 | Missed. 4.4 lb Freon release. Probably got site 7. Calib seems to be drifting. Tom H. says probably bad cal here | 128 | | 30 | 1024 | FP |
| m4s9n32n_19981108_005033 | 9 | 32 | 108 | 354 | 871 | Got it. Freon gas flowing. 4.2 lb release. Should have all "X" targets. Got ATARS. See large plume. | 128 | 2694 | 30 | 1024 | FP |
| m4s4n39n_19981108_005710 | 4 | 39 | 110 | 270 | 868 | Got it. Other Twin Otter in view. All of site 4. | 128 | | 30 | 1024 | FP |
| m4s9n46n_19981108_010710 | 9 | 46 | 112 | 0.0 | 867 | Got it. 4.4 lb release. All "X" in filed. Got ATARS. Release at L3389. | 128 | 3389 | 30 | 1024 | FP |
| m4s9n53n_19981108_011835 | 9 | 53 | 116 | 359 | 883 | Got it. 26.8 lb Freon release. | 128 | | 30 | 1024 | FP |
| m4s4n60e_19981108_012603 | 4 | 60 | 107 | 87 | 871 | Got it. Image became brighter for approx 100 frames at 01:24 GMT as if prolonged version of the horizontal striping effect. Only E-W flight over site 4. One targ at extreme edge. | 128 | | 30 | 1024 | FP |
| m4s6n67w_19981108_013144 | 6 | 67 | 112 | 268 | 870 | Got it. Good site 6. | 128 | | 30 | 1024 | FP |
| m4s5n74n_19981108_013701 | x 5 | 74 | 114 | 0.0 | 866 | Missed. Lights not visible. Also bad pixels. | 128 | | 30 | 1024 | FP |
| m4s5n81n_19981108_014441 | x 5 | 81 | 114 | 356 | 866 | Got site 7. Missed site 5. | 128 | | 30 | 1024 | FP |
| m4s5n88n_19981108_015135 | x 5 | 88 | 117 | 355 | 853 | Got part of site 5. Got site 6. | 128 | | 30 | 1024 | FP |
| m4s5n95n_19981108_015823 | x 5 | 95 | 118 | 356 | 858 | Missed. No lights. Missed to east. | 128 | | 30 | 1024 | FP |
| m4s5n108n_19981108_020557 | 5 | 108 | 114 | 0 | 862 | Got it. Finally! Good site 5. | 128 | | 30 | 1024 | FP |
| m4s7n115n_19981108_020557 | x 7 | 115 | 117 | 352 | 852 | Missed. Missed to west. | 128 | | 30 | 1024 | FP |
| m4s7n122n_19981108_021753 | 7 | 122 | 120 | 350 | 875 | Got it. | 128 | | 30 | 1024 | FP |
| m4s3n129n_19981108_022359 | 3 | 129 | 122 | 359 | 844 | Got it. Got silica. too. All of site 3, 2/3 of site 4. | 128 | | 30 | 1024 | FP |
| m4s4n136n_19981108_023007 | x 4 | 136 | 117 | 359 | 860 | Just missed. Got site 3. Missed some of site 4. | 128 | | 30 | 1024 | FP |
| m4s4n143n_19981108_023551 | 4 | 143 | 118 | 356 | 851 | Got it & site 3. Got all of site 4, some of site 3, and the silica. | 128 | 2438 | 30 | 1024 | FP |

Dark HORSE 2 / HYDRA
Flight Log and Quick-Look Summary

| Mission 5 Monday 9 Nov 98 / 1800-2030 | | | | | | | | | | |
|--|------|------|---------------------|---------------------|--------|---|-----|-----------------------|-------|---------|
| Foggy, clouds at ~3000 ft | | | | All tanks at site 4 | | | | Session 981109_110650 | | |
| File (Zulu time) | Site | Shot | SOG Gnd Speed | COG Dir | Alt(m) | Comments | Pix | Lines | Bands | Type |
| m5s4n6n_19981109_112253 | x 4 | 6 | 115 | 359 | 874 | Missed some. Too far east | 128 | | 30 | 1024 FP |
| m5s4n13n_19981109_112905 | 4 | 13 | 113 | 358 | 872 | All of site 3, too. Good shot of site 4. | 128 | 943 | 30 | 1024 FP |
| m5s6n20w_19981109_113633 | x 6 | 20 | 111 | 271 | 887 | Site 4, too. Missed, started too late. | 128 | | 30 | 1024 FP |
| m5s5n27n_19981109_114108 | x 5 | 27 | 120 | 351 | 863 | Good shot of site 5. | 128 | | 30 | 1024 FP |
| m5s7n34n_19981109_114721 | 7 | 34 | 119 | 358 | 878 | Good shot of site 7. | 128 | | 30 | 1024 FP |
| m5s3n41n_19981109_115325 | 3 | 41 | 145 | 355 | 872 | All of s3 but somewhat to west. | 128 | | 30 | 1024 FP |
| m5s4n48n_19981109_115856 | 4 | 48 | 117 | 356 | 866 | All of site 4, slightly to east. | 128 | | 30 | 1024 FP |
| m5s6n55w_19981109_120528 | 6 | 55 | 114 | 264 | 894 | Site 4, too. Good shot of site 6w. South 2/3 of site 4. | 128 | | 30 | 1024 FP |
| m5s5n62n_19981109_121038 | x 5 | 62 | 121 | 354 | 877 | Missed. | 128 | | 30 | 1024 FP |
| m5s3n69n_19981109_121622 | x 5 | 69 | 120 | 356 | 857 | Started too late. | 128 | | 30 | 1024 FP |
| m5s9n76n_19981109_122250 | 9 | 76 | 117 | 0 | 885 | 1 to 3 kt N to S ??? ????? Good shot of acetone release. Some of ATARS targ | 128 | | 30 | 1024 FP |
| m5s9n83n_19981109_123012 | 9 | 83 | 121 | 358 | 867 | Lines on ATARS thermally resolved. Good shot of acetone release. Most of ATARS | 128 | | 30 | 1024 FP |
| m5s9n90n_19981109_123801 | 9 | 90 | 114 | 1 | 879 | 306 ml flow on all 3 ???? | 128 | | 30 | 1024 FP |
| m5s9n97n_19981109_130132 | 9 | 97 | 114 | 358 | 876 | Good shot of acetone release. Some of ATARS | 128 | | 30 | 1024 FP |
| All tanks at site 4 | | | | | | | | | | |
| Session 981109_124602 | | | | | | | | | | |
| File (Zulu time) | Site | Shot | SOG Gnd Speed | COG Dir | Alt(m) | Comments | Pix | Lines | Bands | Type |
| m5s4-6n18w_19981109_130132 | 6x | 18 | 120 | 267 | 1898 | Site 5,6,3 maybe 4. All of s3, north 2/3 of s4. | 128 | | 30 | 1024 FP |
| m5s5-6n32n_19981109_131310 | 6x | 25 | 129 | 359 | 1890 | Site 3 & 4. | 128 | | 30 | 1024 FP |
| m5s7-9n39n_19981109_132002 | 6x | 32 | 127 | 356 | 1890 | Sites 5,6. Good shots of both 5&6. | 128 | | 30 | 1024 FP |
| | 6x | 39 | 125 | 356 | 1875 | Site 7, site 9. Good shot of s7 and s9. | 128 | | 30 | 1024 FP |